


## SOFTTOUCH TECHNOLOGIES INTRODUCES IR TOUCH IN METAL / ALUMINIUM FRAME

Stable, no-excursion  
 Not affected by Electrical Current, Voltage  
 Static, suitable for bad condition and Environment  
 High Light Transmission, up to 100%  
 Anti-scratch, touch resolution reach 4096\*4096, long  
 Life time for Usage Easy touch, unlimited for touch medium

Touch points : 1, 2, 4, 6, 10, 12 upto 32 touch points

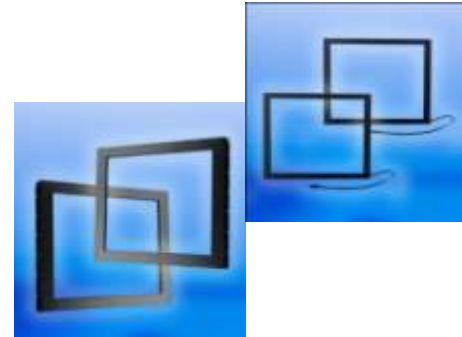

### IR Touch Screen Technical Parameter Table

Touch Resolution	4096x4096
Transparency	100% no glass 98% with tempered glass
Scanning Speed	>100Scans/S
Response Speed	<12ms
Touch precision	0.625mm
Minimum Touch object	>=5mm
Touch Intensity	Over 60,000,000 Single Point Touch
Operation System	Win 7 or Win 8, Linux, Android (Drivers to be requested separately)
Operating Voltage	DC 5V ±5%
Power Supply	USB Interface
Power	<1W (Current<200mA)
Communication	USB
Sunlight Operable	Operable in various light conditions, indoor and outdoor
Vandal-Proof	Steel Ball (Diameter 63.5mm 1040g Weight) drop from 1040mm, No break
Temperature Operating	-41°C ~70°C
Temperature Storage	-50°C ~85°C
Altitude	3000m
Noise	None
Drift	No drift, Do not change with the environment
Life Time	10 Year

### SIZES AVAILABLE WITH DIMENSIONS

15", 17", 19", 21.5", 24", 26", 27" 32", 40", 42", 55", 65", 72", 85", 95" & any customized size after that.

### SoftTouch Technologies

Office #18, First Floor, Raka Palace, Near Indian Overseas Bank Chinchwad, Pune – 411 033 Maharashtra, India	Works #46,47 B Wing, Sanghvi Steel Compound, Mohan Nagar, Chinchwad, Pune – 411019 Maharashtra, India
--	---

Office Phone: +91-20-64100281 / 65103865

Email: [sales@softtouch.co.in](mailto:sales@softtouch.co.in) URL: [www.softtouch.co.in](http://www.softtouch.co.in)